

# HEARING PROTECTION


## PROBULLET™ DISPOSABLE EARPLUGS UNCORDED | 10 PACK | 50 PACK

PRODUCT DATA SHEET: EPOU-10 | EPOU-50



PRODUCT CODE:  
EPOU-10

PRODUCT CODE:  
EPOU-50

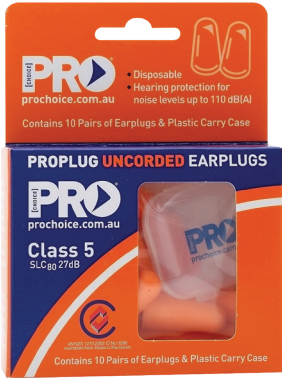

### FEATURES AND BENEFITS

- Certified to AS/NZS 1270:2002 Acoustic Hearing Protectors Class 5 SLC<sub>80</sub> 27dB.
- Hearing protection for noise levels to 110dB(A).
- Hi-vis orange for visual identification & compliance.
- Economical & convenient choice for work situations that demand a high degree of comfort, frequent changes or where hygiene presents a problem for re-use.
- Smooth tapered shape for easy insertion into the ear canal.
- Range of pack sizes & dispensing options.
- Refill bag compatible with the Pro Choice Safety Gear dispenser station.

### AVAILABLE IN

PRODUCT CODE	UOM	MOQ	CTN QTY
EPOU-10	BOX	1 BOX (10 PAIRS)	200 BOXES (2000 PAIRS)
EPOU-50	PACK	1 PACK (50 PAIRS)	100 PACKS (5000 PAIRS)

### MAINTENANCE

Before handling any earplugs, ensure hands are clean. Always check your earplugs and discard if damaged, worn or dirty. Silicone plugs can be washed if necessary. Single use ear plugs can cause health issues if used when dirty.

If kept clean and undamaged, silicone (reusable) ear plugs can be used many times over. Clean with mild soap/water and store in a case away from extreme heat and direct sunlight when not in use. On banded earplugs, clean and replace pads regularly as required.

### APPLICATIONS

Agriculture, Construction, Fire Protection, Food Services, Forestry, Government, Emergency Services, Manufacturing, Medical, Military, Councils, Mining, Oil and Gas, Pharmaceutical, Steel and Metals, Transportation, Welding, Logistics and Transport, Automotive & Utilities.



### PRODUCT DETAILS

Material:	PU Foam
Length:	2.8cm
Diameter:	1.2cm
Weight:	3.1g
Colour:	Hi-Vis Orange Foam

### TEST DATA

ATTENUATION TABLE (ATTENTION IN DECIBELS)							
Frequency Hz	125	250	500	1000	2000	4000	8000
Mean Attenuation	24	26.0	29.7	29.6	33.9	41.4	42.0
Standard Deviation	6.3	6.7	7.3	6.1	4.6	6.6	7.3
Mean-Minus-Standard Deviation Attenuations	17.7	19.3	22.4	23.5	29.3	34.8	34.7

SLC<sub>80</sub> Value is 27 (Class 5)

### STANDARDS

**CERTIFIED TO:**  
AS/NZS 1270:2002 Acoustic Hearing Protectors Class 5 SLC<sub>80</sub> 27dB.

When selected, used & maintained as specified in AS/NZS 1269, this protector may be used in noise up to 110dB(A) assuming an 85dB(A) criterion. A lower criterion may require a higher protector class.



**PARAMOUNT SAFETY PRODUCTS AUSTRALIA**  
12 FELLOWSHIP ROAD,  
GNANGARA, WA 6077  
TECH SUPPORT: 1300 275 820  
CUSTOMER SERVICE: 1300 770 723  
EMAIL: INFO@PARAMOUNTSAFETY.COM

**PARAMOUNT SAFETY PRODUCTS NEW ZEALAND**  
7 SIR WOOLF FISHER DRIVE, HIGHBROOK,  
EAST TAMAKI, AUCKLAND 2013  
TECH SUPPORT: 0800 888 778  
CUSTOMER SERVICE: 0800 888 778  
EMAIL: INFO@PARAMOUNTSAFETY.CO.NZ

PROCHOICESAFETYGEAR.COM  
PARAMOUNTSAFETY.COM

**PRO**  
PRO CHOICE SAFETY GEAR  
FROM  
**PARAMOUNT**  
SAFETY PRODUCTS