

# RESPIRATORY GEAR

## MAXI MASK 2000™ HALF FACE RESPIRATOR PARTICULATE HANDY PACK

PRODUCT DATA SHEET: HMP2-HP



PRODUCT CODE:  
HMP2-HP



### FEATURES AND BENEFITS

- Certified to AS/NZS 1716:2012 Respiratory Protective Devices.
- Durable thermoplastic rubber mask for superior fit.
- Retro reflective tape for improved wearer visibility.
- Enhanced bolstered four point cradle suspension harness for improved load bearing, better fit & comfort.
- Low resistance exhalation valve to reduce heat & moisture build up.
- Twin filter design provides a more balanced fit, lower breathing resistance & improves field of vision.
- Kit includes: 1 x Mask, 2 x P2 Filters, 5 x pairs of P2 Pre Filters, 1 x Resealable Plastic Box for hygienic storage, & 1 x Reusable Plastic Bag.

### AVAILABLE IN

PRODUCT CODE	QUANTITY	CARTON
HMP2-HP	1 Handy Pack	12 Handy Packs

### PRODUCT DETAILS


**Mask:** TPE (Thermoplastic Elastomer)  
**Harness:** 4 Point Elastic Halo Harness  
**Filter Connection:** Bayonet  
**Filter Cartridges:** P2  
**Mask Weight:** 85g

### CARE INSTRUCTIONS

Shelf life of the unopened product is 3 years from date of manufacture when stored within temperature range of -20°C to +25°C & less than 80% relative humidity.

Manufactured date printed onto filters, maximum life span is 6 months once filter is removed from original packaging, however life span is determined by the wearers ability to taste, smell or notice increase in breathing resistance.

Ensure mask is correctly fitted prior to each use & conduct annual fit testing in accordance with AS/NZS 1715:2009.

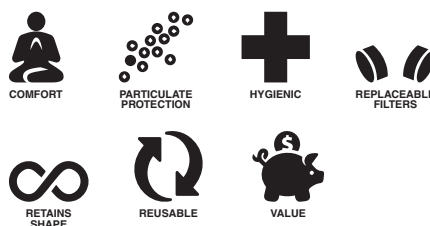

### WARNINGS AND USE LIMITATIONS

1. Facial hair has the potential to compromise the required protective seal of the respirator.
2. Ensure adequate oxygen levels are present.
3. Ensure the contamination is known & the respirator is suitable for the application.
4. Replace when taste, smell or the breathing resistance is high.
5. Store in a clean, resealable storage device.

### STANDARDS

**CERTIFIED TO:**  
AS/NZS 1716:2012 Respiratory Protective Devices  
Certified by SAI Global

To be used in conjunction with:  
AS/NZS 1715:2009 Selection, Use & maintenance  
of Respiratory Protective Equipment



AS/NZS1716:2012  
Lic SMK1508

CLASSIFICATION	EFFICIENCY	EXAMPLES OF CONTAMINANTS / USES
P1	80% (Particles to 1µm micron = 0.001mm size)	Dust
P2	94% (Particles to 0.3µm micron = 0.0003mm size)	Toxic dusts including asbestos, welding fumes
P3	99.95% (Particles to 0.3µm micron = less than 0.0003mm size)	Toxic dusts including asbestos, welding fumes, full face & powered air performance at P3 only

### APPLICATIONS

The Pro Choice Safety Gear range of respiratory gear is ideal for protection against risks associated with a wide range of applications in both workplace and recreational environments.

Typical applications include but are not limited to: Agriculture, aviation, automotive, chemical manufacturing, construction, forestry, heavy engineering, manufacturing, metal processing, mining and quarrying, transportation.